



Specifications, Listings and Approvals

Material: Injection-molded, glass-filled nylon (proprietary thermoplastic alloy)

Screw Sizes Per Anchor

Sheet metal screw (SMS), fully threaded in anchor		
	MINI SnapSkru	Regular Snapskru
Dia.	#6 (preferred), #7, #8	#6, #7, #8 (preferred), #10
Min. Length	1" + thickness of item being anchored	1-1/4" + thickness of item being anchored

Key Features/Benefits


- Self-drilling – no pre-drilled hole required
- Two styles available:
 - MINI: 0.4" dia. head, 1/4" dia., 1.25" length
 - Regular: 0.62" dia. head; 5/16" dia., 1-5/8" length
- Higher load-bearing capability and screw size range than other self-drilling drywall anchors
- **Built-in "positive-stop"** prevents over-driving the anchor when using a screw gun or hand drill
- **Activate and lock with an audible "POP"**, providing positive feedback that they are installed correctly
- Resist vibration and shock
- Provide high pull-out resistance
 - Do not back out of the wall when the screw is removed
 - Can be removed easily, without damaging wall
- Unique tip prevents "walking" to ensure accurate and easy drilling

NOTE: Only the threaded portion of the screw should be in the anchor itself; any unthreaded shank portion of the screw may be in the fixture or item being anchored, but not in the anchor.

Order Information

Catalog No.	Description	Included Screw Size In Bag/ Box	Screw Size Range	Drywall Thickness	Box / Bag (pcs.)	Inner Carton (pcs.)	Master Carton (pcs.)
30010	SP	100 #8 x 1-1/2" Combo Screws	#6 – #10	3/8" – 5/8"	100	1000	3000
30011	SP	No Screws	#6 – #10	3/8" – 5/8"	100	1000	3000
30012	SP	50 #8 x 1-1/2" Combo Screws	#6 – #10	3/8" – 5/8"	50	500	2500
50100	SP	4 #8 x 1-1/2" Combo Screws	#6 – #10	3/8" – 5/8"	4	40	800
50125	SP	20 #8 x 1-1/2" Combo Screws	#6 – #10	3/8" – 5/8"	20	200	2000
30030	MINI SPM	100 #6 x 1-1/4" Combo Screws	#6 – #8	3/8" – 5/8"	100	1000	5000
30031	MINI SPM	No Screws	#6 – #8	3/8" – 5/8"	100	1000	5000
30032	MINI SPM	50 #6 x 1-1/4" Combo Screws	#6 – #8	3/8" – 5/8"	50	500	2500
50150	MINI SPM	6 #6 x 1-1/4" Combo Screws	#6 – #8	3/8" – 5/8"	6	60	1200
50175	MINI SPM	25 #6 x 1-1/4" Combo Screws	#6 – #8	3/8" – 5/8"	25	250	2500

Installation Instructions



(W) Wall thickness
(T) Item thickness
(S) Screw length = T + 1"

Minimum Drywall Thickness: 3/8"

Maximum Drywall Thickness: 5/8"

Minimum Clearance:

- 5/8" behind 1/2" drywall
- 1/2" behind 5/8" drywall

Additional clearance may be needed for extra-long screws.


Tools Needed: Screw gun with #2 phillips bit (or #2 phillips screwdriver, or electric drill with clutch mechanism and #2 bit)

1. Press tip of SnapSku anchor into drywall using #2 phillips screwdriver or screw gun. Drive anchor clockwise into drywall until anchor stops flush with the outer wall surface.


TIP: To keep anchor in precise position during installation (critical for aligning several anchors), push tip of screwdriver into drywall to mark insertion point.

2. Place item over anchor and insert any fully-threaded screw of appropriate size (see chart on previous page).


3. Tighten screw flush with item. The screw pops open the anchor, locking it on the wall and holding the gypsum board in compression. This reinforces the wall, increasing its holding power significantly.

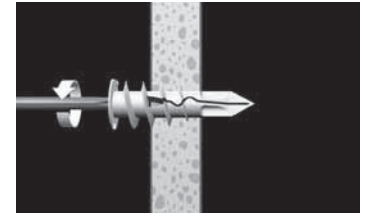

1

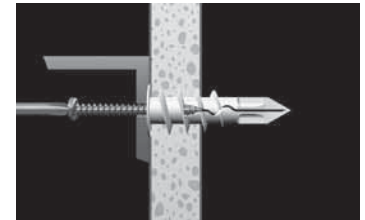

2

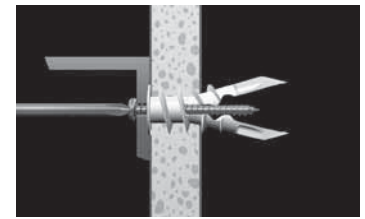

3

Ultimate Tensile (lb.)*

	MINI	Regular
3/8" Drywall	57	57
1/2" Drywall	65	79
5/8" Drywall	95	135
Screw tested:	#6 x 1-1/4"	#8 x 1-1/2"

Ultimate Shear (lb.)*

	MINI	Regular
3/8" Drywall	105	108
1/2" Drywall	131	149
5/8" Drywall	175	178
Screw tested:	#6 x 1-1/4"	#8 x 1-1/2"

*NOTES:

- Ultimate tensile and shear values shown are to be used as a guide only. Industry safety standards recommend using only 1/4 of ultimate tensile and shear values as the maximum load per anchor.
- Ultimate tensile and shear values for a SnapSku anchor vary directly with the strength and thickness of the wall material, the screw size, and the extent of screw engagement.
- The age, condition and capacity of the substrate must be considered.